

ACP-1010

1U Rackmount Chassis for ATX/Micro-ATX Motherboard



CE FCC

Features

- Supports ATX/MicroATX motherboards
- LED indicators for power, HDD, temperature, fan, LAN1 and LAN2
- Supports 1 expansion slot via riser card
- Supports both 250W/350W Flex ATX/PFC power supplies

Vertrieb durch



AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
 09120 Chemnitz Fax: +49/371/38388-99
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de


Specifications

		External	Internal
Driver bay	Slim Optical Disk Drive	1	-
	3.5"	1	1*
	2.5"	-	2*
Cooling	Fan	2 (4 cm/24 CFM each)	
Front I/O Interface	USB 2.0	2	
Miscellaneous	Notification LEDs	System: Power, HDD, Temperature, Fan, LAN1 and LAN2	
	Control	Power switch, system reset & alarm reset button	
	Rear panel	One 9-pin D-Sub opening	
Environment		Operating	Non-Operating
	Temperature	0 ~ 40 °C (32 ~ 104 °F)	-20 ~ 60 °C (-4 ~ 140 °F)
	Humidity	10 ~ 85% @ 40 °C, non-condensing	10 ~ 95% @ 40 °C, non-condensing
	Vibration (5 ~ 500 Hz)	0.5 Grms	2 G
Physical Characteristics	Dimensions (W x H x D)	480 x 44 x 497 mm (19" x 1.7" x 19.6")	
	Weight	8 kg (17.6 lb)	

* Internal driver bay can choose 1 x 3.5" or 2 x 2.5"

* ACP-1010 supports up to CPU 65W under 35 °C for thermal concern.

Front View

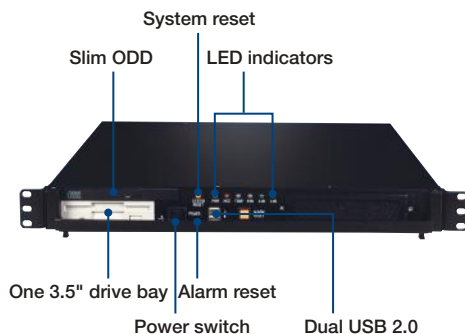


Back View



ADVANTECH iAutomation
 Premier Partner

Dimensions

Unit: mm [inch]

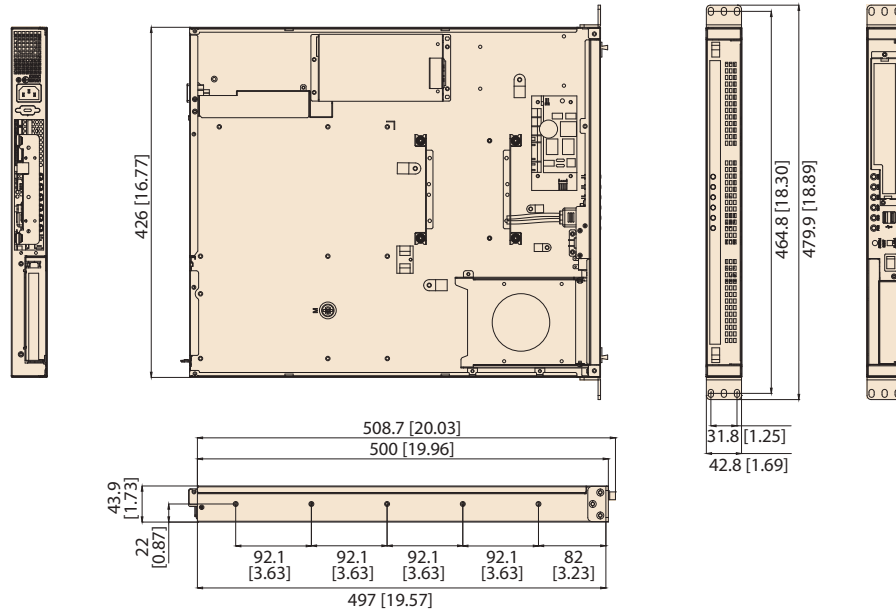

Ordering Information

Part Number	Description
ACP-1010MB-00BE	MB version W/O PSU

* ACP-1010MB does not support AIMB-786 because the height of the audio connector is over 1U.

Spare Parts

Part Name	Description
2130007889S000	Filter 170 x 32 x 5 mm for ACP-1010

Power Supply Options

(For detailed power supply specs, please refer to Chapter 13)

Part Number	80 Plus Bronze	Wattage	Type	Input
PS8-250FATX-BB	Bronze	250W	Single	AC 100 ~ 240 V (full range)
PS8-350FATX-GB	Gold	350W	Single	AC 100 ~ 240 V (full range)

Optional Accessories

Part Name	Description
96CB-SATAPOWER-6P2	SATA power wire 6-pin to big 4-pin (for slim ODD)