

Four & Seven Port Industrial USB Hubs

UHR204 & UHR304, UHR207 & UHR307

Vertrieb durch



AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
 09120 Chemnitz Fax: +49/371/38388-99
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de



PRODUCT FEATURES

- 4 kV Isolation (UHR304, UHR307)
- High Retention USB Port Connectors
- Rugged Metal Case
- Wide Operating Temperature (-40 to 80°C)
- USB 2.0 – Refer to Specification Table
- Heavy Industrial EMC Specifications

Models UHR204, UHR304, UHR207 and UHR307 are industrial-grade four and seven-port USB hubs. Models UHR304 and UHR307 include 4 kV isolation.

These hubs are designed and tested to meet heavy industrial EMC specifications allowing operation where standard office-grade hubs fail – such as near variable frequency drives, motor control centers, welding and other large electrical loads.

High retention USB connectors hold standard USB cables tight and are perfect for high vibration applications – requiring up to 3.2 lbs-force to disconnect them.

4 kV isolation (UHR304, UHR307) between the upstream and downstream USB ports protects expensive equipment from dangerous ground loops and helps ensure data integrity.

These USB hubs are powered from an external 10 to 30 VDC source. Two power connectors are provided – terminal block or threaded/lockable barrel plug. (Refer to ordering information for power supply recommendation.) Each downstream port provides up to 500 mA of power to connected USB devices.

ORDERING INFORMATION

| MODEL NUMBER | DOWNSTREAM PORTS | UPSTREAM PORTS | ISOLATION? |
|--------------|------------------|----------------|------------|
| UHR204 | 4 | 1 | - |
| UHR304 | 4 | 1 | 4kV |
| UHR207 | 7 | 1 | - |
| UHR307 | 7 | 1 | 4kV |

ACCESSORIES




PS12VLB-INT-MED - Power Supply 12VDC, Medical Grade - US, EU, UK Blades

MDR-20-24 - DIN Rail Mount Power Supply 24VDC, 1.0A

USBAMBM-3F - Type A Male to Type B Male, 3 ft. (0.9 m) (Grey)

USBAMBM-6F - Type A Male to Type B Male, 6 ft. (1.8 m) (Grey)

MECHANICAL DIAGRAM - UHR204, UHR304

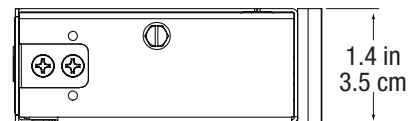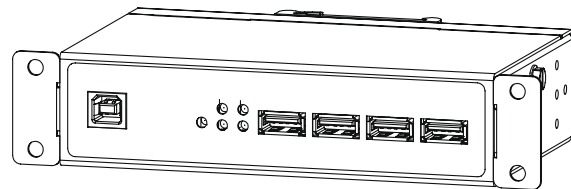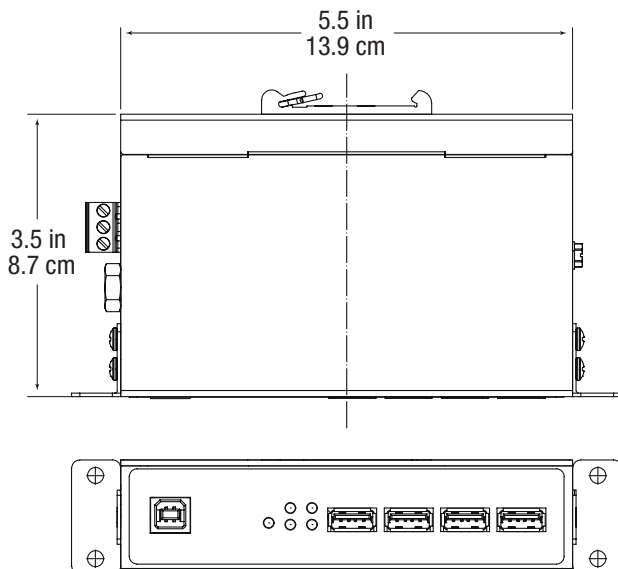

All product specifications are subject to change without notice.

UHRx04 & UHRc07_1217ds

B+B SMARTWORX

Powered by **ADVANTECH**

Irrtum und Änderungen vorbehalten – auch ohne vorherige Ankündigung. Verwendete Hardware- und Softwarebezeichnungen, Marken sowie Firmennamen können eingetragene Warenzeichen sein und unterliegen somit den gesetzlichen Bestimmungen. / Information in this document is subject to change without prior notice. The software and hardware designations or brand names used in this text are in most cases trademarks or registered trademarks of their respective companies and are thus subject to law.

Four & Seven Port Industrial USB Hubs

UHR204 & UHR304, UHR207 & UHR307




SPECIFICATIONS

| USB INTERFACE | |
|------------------|--|
| Standards | USB 1.1 & 2.0 |
| Upstream Port | (1) Type B Female – High Retention |
| Downstream Ports | (7) Type A Female – High Retention (UHR207, UHR307) (4) Type A Female – High Retention (UHR204, UHR304) |
| Speed | 12 Mbps (UHR304, UHR307) 480 Mbps (UHR204, UHR207) Multi-transaction Translator, 1 per port |
| Isolation | 4 kV – Upstream to Downstream (UHR304, UHR307) |
| Surge Protection | +/- 0.5 kV DC Ports, +/- 1 kV Signal Ports |
| ESD | 15 kV Air, 8 kV Contact |
| High Retention | USB ports require 15 N (3.2 lbs-force) withdrawal force using standard USB cable |
| POWER | |
| Source | External - required for UHR304, UHR307, UHR207 Bus Powering - optional for UHR204 |
| Power Connector | Terminal Block or Threaded Barrel Jack |
| Input Voltage | 10 to 30 VDC |
| Power | 16 Watts (UHR304, UHR204) 30 Watts (UHR307, UHR207) |
| Power TB | 3 Position, 5.08 mm Spacing, 28-12 AWG, Solid Wire |
| Barrel Jack | Locking / Threaded, 5.5 mm, Center Positive |
| Downstream Power | 500 mA per port |
| INDICATORS | |
| Power | Green LED |
| Port Ready | Green LED |

| MECHANICAL | |
|---------------------------------|--|
| Dimensions | 20.3x12.1x3.49 cm (8 x 4.75 x 1.38 in) |
| Enclosure | IP 30, Metal |
| Weight | 1.4 lbs – 0.64 kilograms |
| Mean Time Before Failure (MTBF) | UHR304 - 190999 Hours UHR204 - 211773 Hours UHR307 - 143330 Hours UHR207 - 151173 Hours |
| MTBF Calc. Method | MIL 217F Parts Count Reliability |
| ENVIRONMENTAL | |
| Operating Temperature | -40 to 80 °C 0 to 40 °C when using wall plug power supply |
| Storage Temperature | -40 to 85 °C |
| Operating Humidity | 0 to 95% Non-condensing |
| APPROVALS/CERTIFICATIONS | |
| Emissions | FCC Class B, CE EN55022 + AC: Information Technology Equipment - Radio Disturbance Characteristics - Limits & Methods of Measurements 2004/108/EU - Electromagnetic Compatibility Directive 2011/65/EU - Reduction of Hazardous Substances Directive EN61000-6-2 (Heavy Industrial) EN61000-4-2 (ESD) +/- 8kV contact, +/-15 kV air EN61000-4-3 (RI) 10 V/m, 80-1000 Mhz; 3 V/m 1.3 to 2.7 GHz EN61000-4-4 (EFT Burst) +/- 2kV DC ports; +/- 1 kV signal ports EN61000-4-5 (Surge) +/- 2 kV com; +/- 1 kV differential EN61000-4-6 (CI) 10 Vrms, 0.15 to 80 MHz EN61000-4-8 (Magnetic) 10 A/m, 50 Hz & 60 Hz |
| Other | IEC60068-2-27 (Shock) IEC60068-2-6 (Vibration) IEC60068-2-32 (Drop) |
| UL | Class 1 Division 2 Listed File: E245458 |

MECHANICAL DIAGRAM - UHR207, UHR307

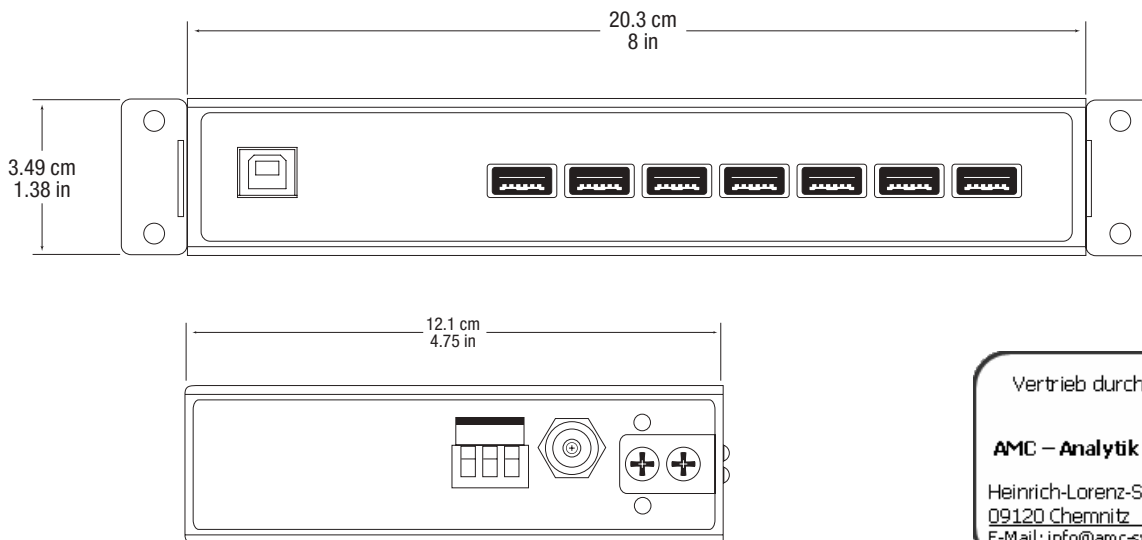

Vertrieb durch


AMC – Analytik & Messtechnik GmbH Chemnitz

 Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
 09120 Chemnitz Fax: +49/371/38388-99
 E-Mail: info@amc-systeme.de Web: www.amc-systeme.de