

EKI-8510G-2FI

8G + 2G SFP Managed TSN Switch

Preliminary



Features

- 8 x Gigabit ports + 2 x Gigabit SFP ports
- IEEE 1588v2 PTP Precision Time Protocol
- Features IEEE 802.1AS Time Synchronization, IEEE 802.1Qbu Frame Preemption, IEEE 802.1Qbv Time Aware Shaper and IEEE 802.1CB Seamless Redundancy
- SFP socket for easy and flexible fiber expansion
- Management: SNMP v1/v2c/v3, WEB, Telnet, standard MIB
- NEMA TS2 for traffic control and EN 50121-4 approval for railway track sides
- Dual 12~48 V_{DC} power input and 1 x relay output

Vertrieb durch



AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
09120 Chemnitz Fax: +49/371/38388-99
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de

Introduction

The EKI-8510G-2FI is the next generation of industrial switch which supports real-time communication through Time Sensitive Networking (TSN) technology. Providing a means for determinism over Ethernet-based networks and guarantee the delivery for those critical real-time applications that require determinism.

The key features of EKI-8510G-2FI TSN switch are: Supports IEEE 1588v2 Precision Time Protocol (PTP) with time synchronization, it is possible for all devices to operate in unison and execute the operation at exactly the required point in time. With IEEE 802.1Qbu for Frame Preemption, it allows for a reduction of transmission latency for express traffic, which can preempt low priority packets. The Time Aware Shaper (TAS) which from IEEE 802.1Qbv, separates communication into fixed lengths and repeating time cycles. This requires transmission guarantees cannot be interrupted. Based on IEEE 802.1CB for Seamless Redundancy, Frame Replication and Elimination for Reliability sends duplicate copies of each frame over multiple paths which control applications that cannot tolerate packet losses.

Specifications

Communications

- **Standard** IEEE 802.3, 802.3u, 802.3x, 802.3z, 802.1D, 802.1w, 802.1p, 802.1Q, 802.1x, 802.3ad, 802.3ab
- **LAN** 10/100/1000Base-T(X), 1000Base-SX/LX/LHX/ XD/ZX/EZX
- **Transmission Distance** Ethernet: Up to 100m
SFP: Up to 110km (depends on SFP)
- **Transmission Speed** Gigabit Copper: 10/100/1000 Mbps, auto-negotiation
Gigabit Fiber: Up to 1000Mbps
- **Switch Capacity** 20 Gbps
- **Transmission Rate** 14.8 Mpps

Interface

- **I/O Port** 8 x 10/100/1000BASE-T/TX RJ-45
2 x SFP (mini-GBIC) port
- **Console port** RS-232 (RJ45)
- **Power Connector** 6-pin screw Terminal Block (including relay)

Mechanism

- **Enclosure** Metal Shell
- **Protection Class** IP 30
- **Installation** DIN-Rail
- **Dimensions (W x H x D)** 54 x 140 x 95mm (2.13" x 5.51" x 3.72" in.)

LED Display

- **System LED** PWR1, PWR2, SYS, P-Fail, P9, P10
- **Port LED** Link / Speed / Activity

Environment

- **Operating Temperature** -40 ~ 70°C (-40 ~ 158°F)
- **Storage Temperature** -40 ~ 85°C (-40 ~ 185°F)
- **Ambient Relative Humidity** 10 ~ 95% (non-condensing)
- **Humidity** 10 ~ 95% (non-condensing)

Power

- **Power Consumption** 12.1W @ 48V_{DC} (System)
- **Power Input** 12 to 48V_{DC}
- **Fault Output** 1 Relay Output

Certification


- **EMI** CE, FCC Class A
- **EMS** EN 61000-4-2
EN 61000-4-3
EN 61000-4-4
EN 61000-4-5
EN 61000-4-6
EN 61000-4-8
- **Shock** IEC 60068-2-27
- **Freefall** IEC 60068-2-32
- **Vibration** IEC 60068-2-6
- **Traffic control** NEMA TS2
- **Railway Track Side** EN 50121-4
- **Patent** <http://www.advantech.com/legal/patent>

* Compliant with UL 62368-1



Dimensions

Unit: mm [inch]

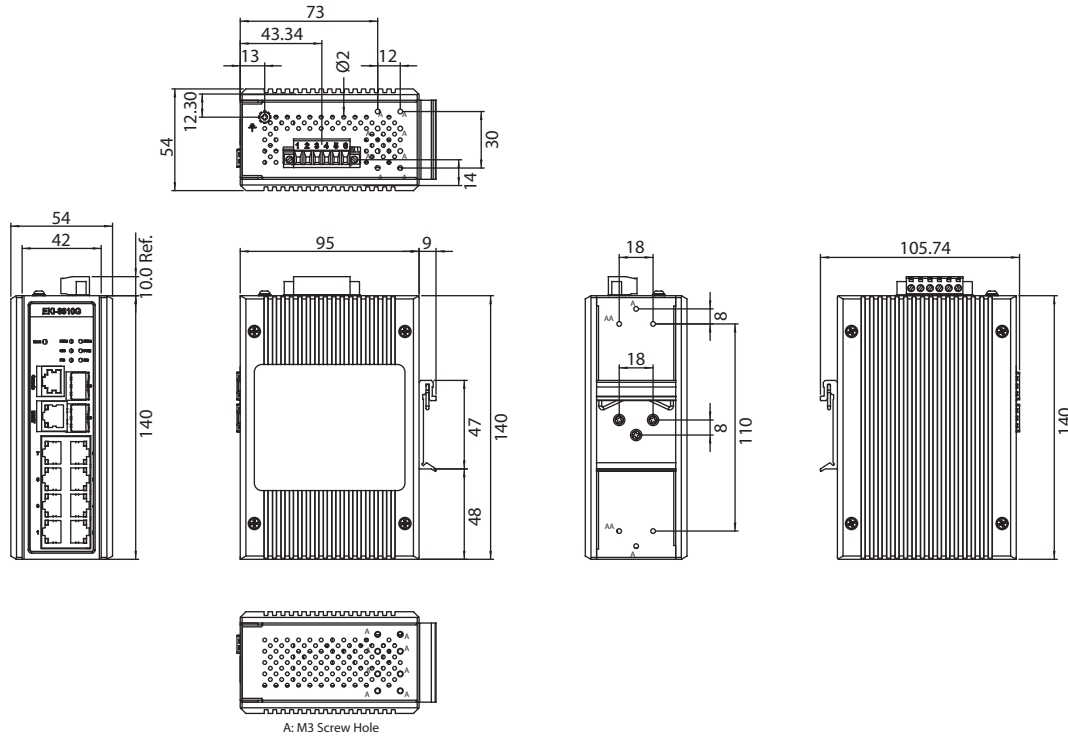

Panel Cut-out Dimensions(W x H x D): 54 x 140 x 95mm (2.13" x 5.51" x 3.72" inch)

L2 Features

- **L2 MAC Address** 32K
- **Jumbo Frame** 10K
- **VLAN Group** 256 (VLAN ID 1 – 4094)
- **Packet Buffer** 32 Mbit
- **VLAN Arrange** Port based VLAN, Q-in-Q (VLAN Stacking), GVRP
- **Port Mirroring** Per port, Multi-source port,
- **IP Multicast** IGMP Snooping v1/v2/v3, MLD Snooping, IGMP Immediate leave
- **Storm Control** Broadcast, Multicast, Unknown unicast
- **Redundancy** IEEE 802.1D-STP, IEEE 802.1s-MSTP, IEEE 802.1w-RSTP
- **Standardized Real-Time Ethernet** Time Sensitive Networks (TSN), IEEE 802.1AS, IEEE 802.1Qci, IEEE 802.1CB, IEEE 802.1Qbu, IEEE 802.1Qbv
- **Time Synchronization** IEEE 802.1AS gPTP, IEEE 1588v2 PTP

QoS

- **Priority Queue Scheduling** WRR (Weighted Round Robin), SP (Strict Scheduling Priority) Hybrid Priority
- **Class of Service** IEEE 802.1p Based CoS, IP TOS, DSCP based CoS
- **Rate Limiting** Ingress Rate limit, Egress Rate limit
- **Link Aggregation** IEEE 802.3ad Dynamic Port Trunking, Static Port Trunking

Security

- **Port Security** Static, Dynamic IP Source Guard, ARP Spoofing Prevention, Access Control List, DHCP Snooping, 802.1x (Port-Based, MD5 Encryption), TACACS+
- **Authentication**

Management

- **DHCP** Client
- **Access** SNMP v1/v2c/v3, WEB, Telnet, Standard MIB
- **Security Access** SSH2.0, SSL
- **Software Upgrade** TFTP, HTTP, Dual Image
- **NTP** SNTP client

Ordering Information

- **EKI-8510G-2FI-AE** 8G + 2G SFP Managed TSN Switch w/Wide Temp.

Note: This document is preliminary version and can be modified without notice.