

WISE-4250

Wi-Fi 2.4/5 GHz 802.11 a/b/g/n/ac I/O and Sensor Module

NEW



Features

- Wi-Fi Dual band 2.4/5 GHz up to 802.11 a/b/g/n/ac
- Support interchangeable I/O and Sensor module
- Support smart roaming function
- MQTT, Modbus/TCP, SNMP, SNT, TCP/IP, HTTP, HTTPS, UDP, and DHCP protocols supported
- Supports X.509 and up to WPA3 /TLS1.3
- UDP based AES-128 encrypted wireless P2P (Peer to Peer) function
- Easy configuration done with web UI with mobile devices and PC
- 10000+ data logger with SNT/RTC time sync and WDT auto connection recovery
- Dropbox, WebAccess, Azure, AWS, EdgeSync 360, Aliyun cloud supported
- Supports RESTful API for IoT integration

Introduction

The WISE-4250 series is an Ethernet-based wireless IoT device, compatible with various I/O and sensors and integrated with IoT data acquisition, processing, and publishing functions and can communicate with different WISE devices via P2P function. Wireless watchdog timer, smart roaming, timestamps data logger and data recovery functions can enhance connection quality and solve risks from data loss. Data and connections can also be protected via X.509 and WPA security, it can be accessed via PC and mobile devices and be published to diverse type of cloud.

Features

IEEE 802.11 a/b/g/n/ac 2.4/5GHz Wi-Fi with AP Mode

The Wi-Fi interface is easily integrated with wired or wireless Ethernet devices, users only need to add a wireless router or AP to extend existing Ethernet network to wireless. The limited AP mode enables the WISE-4250 to be accessed via other Wi-Fi devices directly as an AP.



Data Logger and Recovery

The WISE-4250 can log 10000+ data with time stamp and system log normally or if there's any wireless dis-connection gap. Once the memory is full, users can choose to overwrite the old data to ring log or just stop the log function. This function helps no missing data and help tracking complete data.



HTML5 Web Configuration Interface


All the configuration interfaces are applied in web service, and the web pages are based on HTML5, so users can configure the WISE-4250 without the limitation of OS/devices. You can use your mobile phone or tablet to directly configure the WISE-4250.



Peer to peer

The function can help send signals from one module to another module remotely, periodically and change of status, AI/DI to DO. It support basic mode for one target module/channel and advanced mode for multiple target modules/channels.

The data support UDP protocol (ASCII command) and can be encrypted with AES-128.



Vertrieb durch **AMC**
AMC – Analytik & Messtechnik GmbH Chemnitz
Heinrich-Lorenz-Str. 55 Tel.: +49/371/38388-0
09120 Chemnitz Fax: +49/371/38388-99
E-Mail: info@amc-systeme.de Web: www.amc-systeme.de



ADVANTECH Automation
Premier Partner

Smart Roaming

This function help WISE-4250 series communicate and connect to surrounding AP much more flexibly and effectively to prevent long disconnection idle time and setup more stable network. 802.11 k/v/r are also supported to help on better signal strength management in advance and faster connection time.



Specifications

General


- **WLAN Standard** IEEE 802.11a/b/g/n/ac
- **Modulation** 802.11b : CCK(11, 5.5Mbps), DQPSK(2Mbps), BPSK(1Mbps)
802.11a/g/n/ac : OFDM
- **Transmit Power** 2.4 GHz
802.11b: 16.0 dBm ±2dBm
802.11g: 14.0 dBm ±2dBm
802.11n: 12.0 dBm ±2dBm
5 GHz
802.11a: 13.0 dBm ±2dBm
802.11n: 10.0 dBm ±2dBm
802.11ac: 8.0 dBm ±2dBm
- **Wireless Security** X.509(TLS1.2/1.3), WPA2/WPA3 Personal and Enterprise
- **Antenna** Connector: Reverse SMA
Gain (Peak): 2.4G 3.64 dBi / 5G 5.65 dBi
- **Connectors** Plug-in-and-play I/O and sensor modules
- **Watchdog Timer** System (1.6 second) and Communication (programmable)
- **Certification** CE, FCC, IC, TELEC
- **Dimensions (W x H x D)** 70 x 102 x 38 mm
- **Enclosure** PC
- **Mounting** DIN 35 rail, wall, stack, and pole
- **Power Input** 10 ~ 50 V_{DC}
- **Power Consumption** 1.6W @ 24 V_{DC}
- **RTC Accuracy** ±2 second/day
- **MCU** ARM Cortex M33 160 MHz with 768KB RAM
- **Cloud** Dropbox, WebAccess, Azure, AWS, EdgeSync 360, Aliyun, etc.
- **Support wireless P2P (Peer to Peer) with AES-128 encryption and UDP protocol**
- **Support MQTT data recovery function**
- **Support smart roaming function and 802.11k/v/r**
- **Supports User Defined Modbus Address**
- **Power Reversal Protection**
- **Supports Data Log Function** 10000+ samples with SNTP/RTC sync time stamp
- **Supported Protocols** Modbus/TCP, TCP/IP, SNMP, SNTP, UDP, DHCP, HTTP, HTTPS, and MQTT
- **Supports RESTful Web API in JSON format**
- **Supports Web Server in HTML5 with JavaScript & CSS3**
- **Supports System Configuration Backup and User Access Control**

Environment

- **Operating Temperature** -25 ~ 70°C (-13~158°F)
- **Storage Temperature** -40 ~ 85°C (-40~185°F)
- **Operating Humidity** 10 ~ 85% RH (non-condensing)
- **Storage Humidity** 0 ~ 60% RH (non-condensing)

Dimensions

Unit: mm

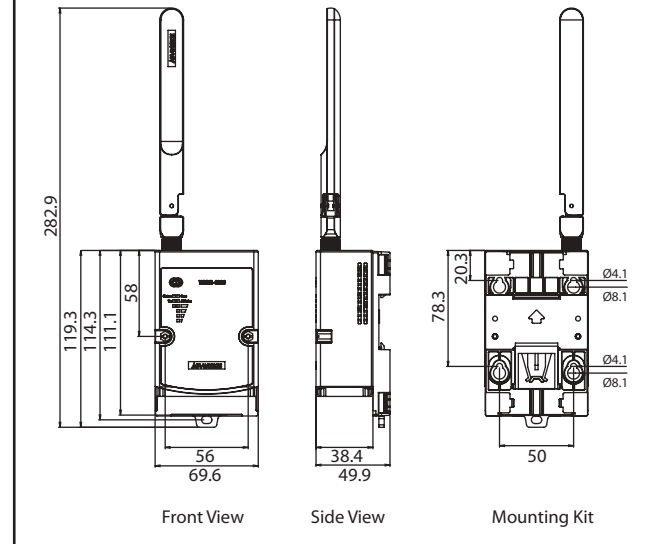

Supported I/O module

WISE-S214 (4AI/4DI)

Analog Input

- **Channels** 4
- **Resolution** 16bits Bipolar; 15bits Unipolar
- **Sampling Rate** 10Hz (Total) with 50/60Hz Rejection
- **Accuracy** ±0.1% for Voltage Input; ±0.2% for Current Input
- **Input Range** 0~150mV, 0~500mV, 0~1V, 0~5V, 0~10V, ±150mV, ±500mV, ±1V, ±5V, ±10V, 0~20mA, ±20mA, 4~20mA
- **Input Impedance** >1MΩ (Voltage)
240 Ω (External resistor for current)
- **Support Data** Max/min, Scaling and Averaging
- **Support burn out detection**
- **Support high/low alarm setup for triggering DO high/low**

Digital Input

- **Channels** 4 Dry Contact (Wet Contact by request for customization)
- **Supports 200Hz Counter Input (32-bit + 1-bit overflow)**
- **Supports keep/discard counter value on power-off**
- **Support inverted digital input status**
- **Support configuration by each channel**
- **Support digital filter (min 0.1ms)**
- **Support high-to-low and low-to-high latch**
- **Supports 3kHz Frequency Input**

WISE-S250 (6DI, 2DO& 1RS-485)

Digital Input

- **Channels** 6 Dry Contact (Wet Contact by request for customization)
- **Supports 3kHz Frequency Input**
- **Supports 200Hz Counter Input (32-bit + 1-bit overflow)**
- **Supports keep/discard counter value on power-off**
- **Support inverted digital input status**
- **Support configuration by each channel**
- **Support digital filter (min 0.1ms)**
- **Support high-to-low and low-to-high latch**

Digital Output (Sink Type)

- **Channel** 2
- **Output Current** 100 mA
At 0 -> 1: 100 us
At 1 -> 0: 100 us
(for Resistive Load)
- **Supports Pules Output** 5 kHz
- **Max. Load Voltage** 30V
- **Support pulse high/low width and duty cycle adjustment**
- **Support high to low and low to high delay time setup**

Serial Port

- **Port Number** 1
- **Type** RS-485
- **Data Bits** 7, 8
- **Stop Bits** 1, 2
- **Parity** None, Odd, Even
- **Baud Rate (bps)** 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
- **Protocol** Modbus/RTU (Total 64 addresses by 30 max. instructions)
- **Support Server response timeout and Delay between Polls setting**

WISE-S251 (6DI/1RS-485)

Digital Input

- **Channels** 6 Dry Contact (Wet Contact by request for customization)
- **Supports 3kHz Frequency Input**
- **Supports 200Hz Counter Input (32-bit + 1-bit overflow)**
- **Supports keep/discard counter value on power-off**
- **Support inverted digital input status**
- **Support configuration by each channel**
- **Support digital filter (min 0.1ms)**
- **Support high-to-low and low-to-high latch**

Serial Port

- **Port Number** 1
- **Type** RS-485
- **Data Bits** 7, 8
- **Stop Bits** 1, 2
- **Parity** None, Odd, Even
- **Baud Rate (bps)** 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
- **Protocol** Modbus/RTU (Total 64 addresses by 30 max. instructions)
- **Support Server response timeout and Delay between Polls setting**

WISE-S472 (1DI/2COM) IP65

Serial Port

- **Port Number** 2
- **Type** Port 1: RS-485; Port 2: RS-485/232
- **Serial Signal** RS-485: DATA+, DATARS-; 232: Tx, Rx, GND
- **Data Bits** 7, 8
- **Stop Bits** 1, 2
- **Parity** None, Odd, Even
- **Baud Rate (bps)** 1200, 2400, 4800, 9600, 19200, 38400, 57600, 115200
- **Protection** 15 kV ESD
- **Protocol** Modbus/RTU (Total 64 addresses by 30 max. instructions)
- **Support Server response timeout and Delay between Polls setting**

Digital Input

- **Channels** 1
- **Input Type** Dry Contact (Wet Contact by request for customization)
- **Logic Level** 0: Open; 1: Close to DCOM
- **Supports 3kHz Frequency Input**
- **Supports 200Hz Counter Input (32-bit + 1-bit overflow)**
- **Supports keep/discard counter value on power-off**
- **Support inverted digital input status**
- **Support configuration by each channel**
- **Support digital filter (min 0.1ms)**
- **Support high-to-low and low-to-high latch**

Ordering Information

Wi-Fi 2.4/5G Wireless I/O Module

- **WISE-4250-A** Wi-Fi5 2.4G/5G Wireless I/O Module

WISE-S200/400 I/O Module

- **WISE-S214-A** 4AI/4DI
- **WISE-S250-A** 6DI, 2DO & 1RS-485
- **WISE-S251-A** 6DI & 1RS-485
- **WISE-S472-A** 1DI & 2COM and IP65
- **WISE-S200/S400** can be customized based on requirement

Accessories

- **PWR-242-AE** DIN Rail Power Supply (2.1A Output Current)
- **PWR-243-AE** Panel Mount Power Supply (3A Output Current)
- **PWR-244-AE** Panel Mount Power Supply (4.2A Output Current)
- **1750008648-01** 2.4/5GHz External Dipole Antenna, Peak Gain : 2.4G 3.64 dBi / 5G 5.65 dBi
- **1750008867-01** Magnetic Antenna Extend Cable Base 150cm
- **1760000897-11** RTC Battery 3V/200 mAh with Cable Connector