

# WISE-4220-S231

## Wi-Fi IoT WSN with Temperature and Humidity Sensors

Vertrieb durch



AMC – Analytik & Messtechnik GmbH Chemnitz

Heinrich-Lorenz-Str. 55  
09120 Chemnitz  
E-Mail: info@amc-systeme.de

Tel.: +49/371/38388-0  
Fax: +49/371/38388-99  
Web: www.amc-systeme.de



### Main Features

**NEW**

- Built-in temperature and humidity sensors
- 2.4GHz Wi-Fi reducing the wiring cost during big data acquisition
- Easily extend the existing network by adding APs, and share existing Ethernet software
- Configured by mobile devices directly without installing any software or Apps
- Zero data loss using the log function with RTC time stamp
- Data can be automatically pushed to Dropbox or computer
- Supports RESTful web API in JSON format for IoT integration



### Introduction

The WISE-4220 series is an Ethernet-based wireless IoT device, integrated with IoT data acquisition, processing, and publishing functions. As well as various I/O and sensor types, the WISE-4220 series provides data pre-scaling, data logic, and data logger functions. These data can be accessed via mobile devices and be published to the cloud with security at anytime and anywhere.

### Features

#### IEEE 802.11 b/g/n 2.4GHz Wi-Fi with AP Mode

The Wi-Fi interface is easily integrated with wired or wireless Ethernet devices, users only need to add a wireless router or AP to extend existing Ethernet network to wireless. The limited AP mode enables the WISE-4220 to be accessed via other Wi-Fi devices directly as an AP.




#### HTML5 Web Configuration Interface

All the configuration interfaces are applied in web service, and the web pages are based on HTML5, so users can configure the WISE-4220 without the limitation of OS/devices. You can use your mobile phone or tablet to directly configure the WISE-4220.



#### RESTful Web Service with Security Socket

As well as supporting Modbus/TCP, the WISE-4220 series also supports IoT communication protocol, RESTful web service. Data can be polled or even be pushed automatically from the WISE-4220 when the I/O status is changed. The I/O status can be retrieved by internet media types like JSON. The WISE-4220 also supports HTTPS which has security that can be used in a Wide Area Network (WAN).

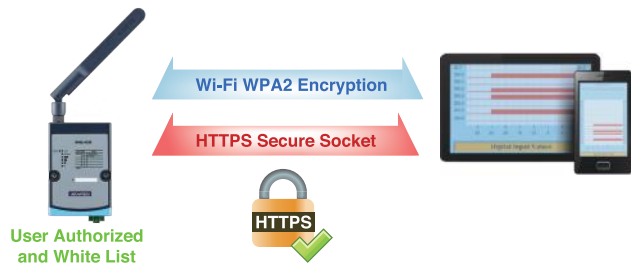

#### Data Storage

The WISE-4220 can log up to 10,000 samples of data with a time stamp. The I/O data can be logged periodically, and also when the I/O status changes. Once the memory is full, users can choose to overwrite the old data to ring log or just stop the log function.



#### Cloud Storage

Data logger can push the data to file-based cloud services like Dropbox using pre-configured criteria. With RESTful API, the data can also be pushed to a private cloud server in the format of JSON. Users can setup their private cloud server using the provided RESTful API and their own platform.



## Specifications

### Temperature Sensor

- Operating Range -25°C ~ 70°C (-13°F ~ 157.9°F)
- Resolution 0.1 (°C/°F/K)
- Accuracy ±1.0°C (±1.8°F) (vertical installation)

### Humidity Sensor

- Operating Range 10 ~ 90% RH
- Resolution 0.1% RH
- Accuracy ±4% for 0%~50% RH  
±6% for 50%~60% RH  
±10% for 60%~90% RH


### General

- WLAN IEEE 802.11b/g/n 2.4GHz
- Outdoor Range 150m with line of sight
- Connectors Plug-in screw terminal block (power)
- Watchdog Timer System (1.6 second) and Communication (programmable)
- Certification CE, FCC, IC, RED, NCC, SRRC, RCM, VCCI, TELEC (CC3200 listed antenna)
- Dimensions (W x H x D) 70 x 102 x 38 mm
- Enclosure PC
- Mounting DIN 35 rail, wall, stack, and pole
- Power Input 10 ~ 50 V<sub>DC</sub>
- Power Consumption 1.2 W @ 24 V<sub>DC</sub>
- Power Reversal Protection
- Supports User Defined Modbus Address
- Supports Data Log Function Up to 10000 samples with RTC time stamp
- Supported Protocols Modbus/TCP, TCP/IP, UDP, DHCP, and HTTP
- Supports RESTful Web API in JSON format
- Supports Web Server in HTML5 with JavaScript & CSS3
- Supports System Configuration Backup and User Access Control

### Environment

- Operating Temperature -25 ~ 70°C (-13~158°F)
- Storage Temperature -40 ~ 85°C (-40~185°F)
- Operating Humidity 20 ~ 95% RH (non-condensing)
- Storage Humidity 0 ~ 95% RH (non-condensing)

## Pin Assignment

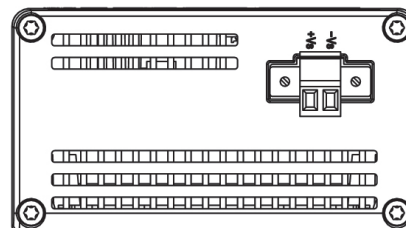

## Ordering Information

- WISE-4220-S231A IoT WSN with Temperature and Humidity Sensors

### Selection Table

Model Name	Analog Input	Digital Input	Digital Output	Relay Output	RS-485	Built-in Sensor
WISE-4012	4		2			
WISE-4050		4	4			
WISE-4051		8			1	
WISE-4060		4		4		
WISE-4220-S231						Temp. & Humidity

### Accessories

- PWR-242-AE DIN-rail Power Supply (2.1A Output Current)
- PWR-243-AE Panel Mount Power Supply (3A Output Current)
- PWR-244-AE Panel Mount Power Supply (4.2A Output Current)

## Dimensions

